

ART.346210

NR./NO.

AKTIVATOR / RELAIS ACTIVATEUR / ATTUATORE

RUF/APPEL/CHIAMATA

o

MOD = SLA


1

STANDARD

- AKTIVATOR STANDARD
- ACTIVATEUR STANDARD
- ATTUATORE STANDARD

* NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO


POT.FREI-LIBRE DE PORT.



HV-TB
-30T1
BTICINO
(6TE)
1,2A

PROG.

MOD = SLA
M = .
M = .
N = *
P = *
T = 2



-30K6
BTICINO
346210
RELAIS
(2TE)


T = Position / Position / Posizione

Konfig. Config.	-	1	2	3	4	5	6	7	8	9
Min.	3	1	3	6	10	1	6	10	Taster Bouton Pulsante	ON OFF

2


12VAC - MOD = SLA

- AKTIVATOR MIT 8-12V VA GONG
- ACTIVATEUR AVEC CARILLONS 8-12V VA
- ATTUATORE CON SUONERIA 8-12V VA




HV-TB
-30T1
BTICINO
(6TE)
1,2A

MOD = SLA
M = .
M = .
N = 1
P = 3
T = 2




-30K4
BTICINO
346210
RELAIS
(2TE)

TRANSFO.
-30T7
LEGRAND
(2TE)
12V/24VAC



GONG
-30P7/4
LEGRAND
041650
8-12VAC

z.b / par.ex. / per.es

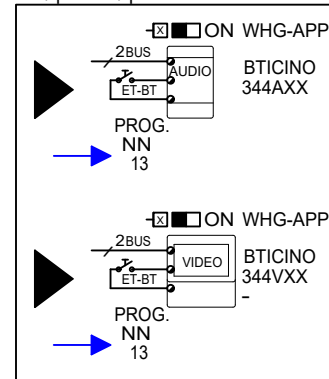


* NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO

ART.346210
z.b / par.ex. / per.es
WHG-APP Nr. 13
N= 1
P= 3

3


230V - MOD = SLA

- AKTIVATOR ZB. MIT GONG, HORN, BLITZLEUCHTE
- ACTIVATEUR PAR.EX. AVEC SONNERIE, CORNE, LAMPE CLIGNOTANTE
- ATTUATORE PER. ES. CON SUONERIA, CORNO, LUCE LAMPEGGIANTE



HV-TB
-30T1/2
BTICINO
(6TE)
1,2A

MOD = SLA
M = .
M = .
N = 5
P = 5
T = 2



-30K4/1
BTICINO
346210
RELAIS
(2TE)

GONG
-30P7/5
LEGRAND
041651
230V


SIRENE/SIRENA
-30P9
230VAC
88dB

GONG
-30P11
FUNK
RADIO

FUNK
-30S12
RADIO

* NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO

z.b / par.ex. / per.es

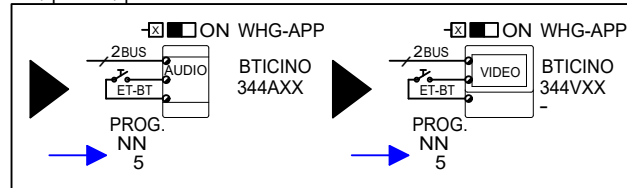

ART.346210
z.b / par.ex. / per.es
WHG-APP Nr. 5
N= .
P= 5

Info: Verdrillte kabel verwenden / Utiliser des câbles torsadés / Utilizzare cavi twistati / Art.336904 - Eldas 101 282 009 // VIDEO max.200m // AUDIO max.1000m



Legrand (Schweiz) AG
Industriestrasse 25
5033 Buchs

INTERNET-DOORENTRY-SFERA
07-999996

346210-MOD=SLA-STANDARD

Name/Nom.

Admin_Esposito

Dat./Dat.

19.08.2021

Schema Nr./Schéma No.

BTICINO-NR. 202111042231

Bl./Pag.

30

Bl./Pag.

100

< 23

31 >

RELAIS\346210\346210-MOD=SLA\

08.11.2021

ART.346210

NR./NO.

AKTIVATOR / RELAIS ACTIVATEUR / ATTUATORE

RUF/APPEL/CHIAMATA

o

MOD = SLA


1

STANDARD

- AKTIVATOR STANDARD
- ACTIVATEUR STANDARD
- ATTUATORE STANDARD

* NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO

POT.FREI-LIBRE DE POT.



HV-TB
-31T1
BTICINO
(6TE)
1,2A

PROG.

MOD = SLA


M = .

M = .

N = *

P = *

T = 2




-31K6
BTICINO
346210
RELAIS
(2TE)

T = Position / Position / Posizione

Konfig. Config.	-	1	2	3	4	5	6	7	8	9
	3	1	3	6	10	1	6	10	Taster Bouton Pulsante	ON OFF
	Min.	sec.	sec.	sec.	sec.	Min.	Min.	Min.		

4

ARZTSCHALTUNG FONCTION DE MEDECIN FUNZIONE MEDICO



HV-TB
-31T1
BTICINO
(6TE)
1,2A

PROG.

MOD = 5


M = .

M = .

N = .

P = .

T = 2



-31K4
BTICINO
346210
RELAIS
(2TE)

TRANSFO.

-31T7

BTICINO

(4TE)


12V DC

+V

-V

146712

230V



1-KAN./CAN.
-31P8
LEGRAND
412725
ALPHAREX3
(2TE)

PROG.

MOD = SLA


M = .

M = .

N = **


P = **

T = 2



-31K11
BTICINO
346210
RELAIS
(2TE)

z.b / par.ex. / per.es

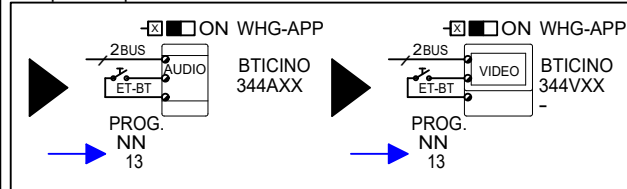


** NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO

ART.346210
z.b / par.ex. / per.es
WHG-APP Nr. 13
N = 1
P = 3

5

PÖSTLER SCHALTUNG OUVERTURE POUR LE FACTEUR APERTURA PER IL POSTINO



HV-TB
-31T1
BTICINO
(6TE)
1,2A

PROG.

MOD = 5


M = .

M = .

N = .

P = .

T = 2



-31K4
BTICINO
346210
RELAIS
(2TE)

TRANSFO.

-31T7

BTICINO

(4TE)


12V DC

+V

-V

146712

230V



1-KAN./CAN.
-31P8
LEGRAND
412725
ALPHAREX3
(2TE)

PROG.

MOD = SLA


M = .

M = .

N = ***


P = ***

T = 2



-31K11
BTICINO
346210
RELAIS
(2TE)

z.b / par.ex. / per.es

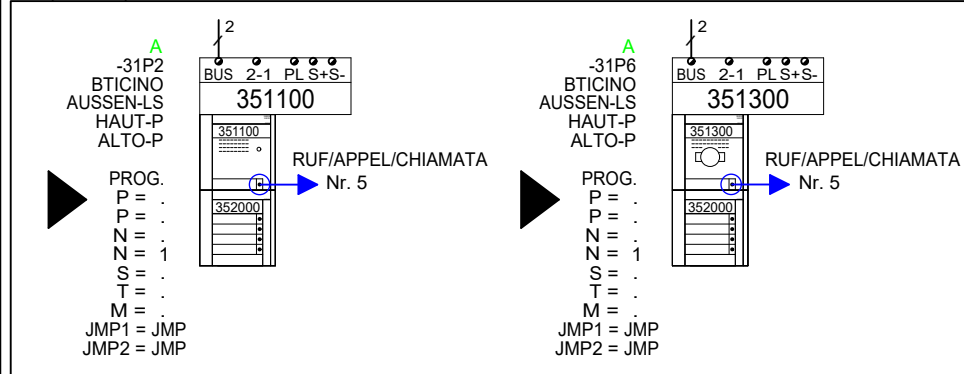

*** NUMMER DER INNENSPECHSTELLE
NUMERO DE POSTE INTERIEUR
NUMERO DEL POSTO INTERNO

ART.346210
z.b / par.ex. / per.es
WHG-APP Nr. 5
N = .
P = 5

Info: Verdrillte kabel verwenden / Utiliser des câbles torsadés / Utilizzare cavi twistati / Art.336904 - Eldas 101 282 009 // VIDEO max.200m // AUDIO max.1000m



Legrand (Schweiz) AG
Industriestrasse 25
5033 Buchs

INTERNET-DOORENTRY-SFERA
07-999996

346210-MOD=SLA-STANDARD

Name/Nom.

Admin_Esposito

Dat./Dat.

19.08.2021

Schema Nr./Schéma No.

BTICINO-NR. 202110292127

Bl./Pag.

31

Bl./Pag.

100

< 30

60 >

RELAIS\346210\346210-MOD=SLA\

08.11.2021